



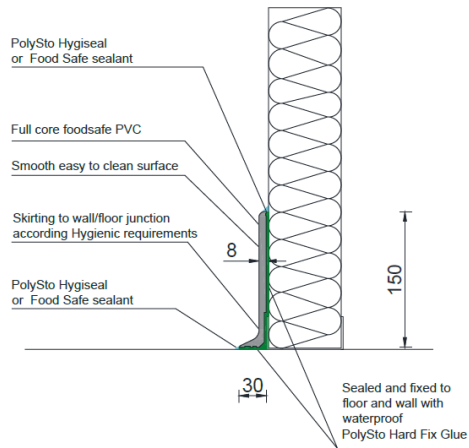

Protection level 1
Protection against cleaning.



Specification

PolySto PV15F is a prefabricated full core PVC skirting 2000x8x150mmH with sloped top and skirting to wall-floor according hygienic requirements. The PV15F skirting consists of a food grade PVC mass. Including matching accessories; prefabricated internal and external corners.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant or a chemical welding HygiSeal.

Available in colour white and light grey.

Consumption

Consumption Food Safe sealant (per meter)

Food Safe sealant white	150 cc
Food Safe sealant transparent	115 cc
Hard Fix Glue	220 cc
Installation m/day (8h) with 1 installer	40 meter


Consumption HygiSeal (per meter)

HygiSeal white	100 cc
Hard Fix Glue	220 cc
Installation m/day (8h) with 1 installer	30 meter


Technical info

	Kerb	Corner internal / external
Length	2.000 mm	160/160 mm
Height	150 mm	150 mm
Thickness	8 mm	8 mm
Weight	4 kg	0,70 kg
Amount / pallet	500 m	300 pc
Pallet size	210x80x70cmH	120x80x70cmH
Pallet weight	+ - 1.050 kg	+ - 220 kg

Kerb



Internal corner



External corner

