

PROSKIRTING FLAT



DESCRIPTION


PROSKIRTING FLAT is an aluminium skirting board profile conveniently designed to be recessed in the plaster-board walls. The profile, after laying, thanks to its particular geometry, is perfectly aligned with the wall and has a modern and elegant design.

MATERIAL

PROSKIRTING FLAT is a skirting board profile, with a height of 60 mm. It is composed of a pre - punched natural aluminium support that must be fixed with screws every 50 cm, and a profile to fix to the support. Available in anodized silver aluminium, brushed silver aluminium and white varnished aluminium. It allows the installation of low-voltage electric cables like web, computer, telephone and satellite TV cables that will always be easily accessible. Equipped with an external corner. **PROSKIRTING FLAT**, after laying, thanks to its particular geometry, is perfectly aligned with the wall and has a modern and elegant design.

AREAS OF USE

PROSKIRTING FLAT in aluminium is suitable for every indoors environments.

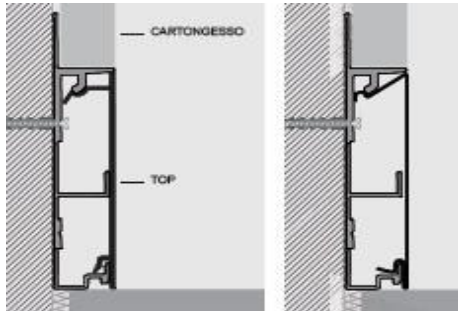

WARNINGS


Do not use **PROSKIRTING FLAT** in aluminium, outdoor and in environments where aggressive substances are present.

MAINTENANCE

PROSKIRTING FLAT does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROSKIRTING FLAT**" in the desired finish.
2. Fix the pre-punched support to the wall with screws.
3. Lay the plasterboard aligning it on the bottom with the support.
4. Grout the plasterboard and apply the desired finish.
5. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV.
6. Attach the profile to the support applying a low pressure.

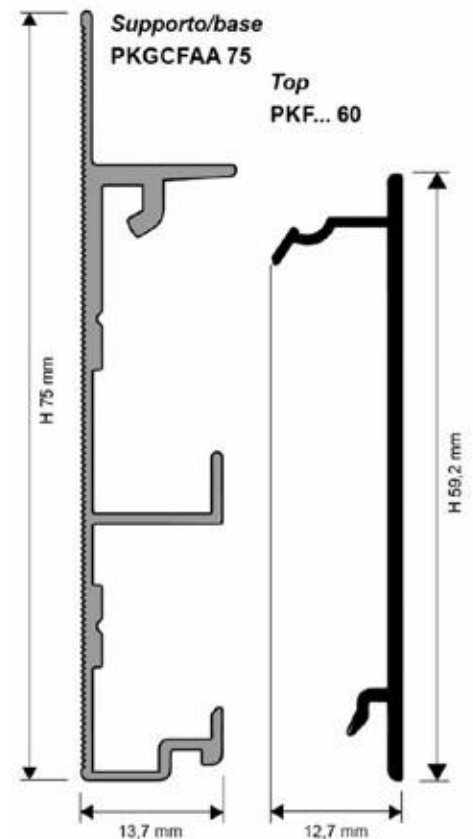

TEXT TEMPLATE FOR TENDERS

Delivery and installation of skirting board profile, with a height of 60 mm. It is composed of a pre-punched natural aluminium support, that can be fixed to the wall with screws and an anodised silver aluminium / brushed silver aluminium / white varnished aluminium profile to fix to the support. The profile allows the installation of low - voltage electric cables that will always be easily accessible, like PROSKIRTING FLAT of the Progress Profiles company.

PKFL... 60/60-01 : Anodized, brushed and varnished aluminium.

Profile height :	_____ mm
Profile length :	_____ mt
Material :	_____ €/mt
Application :	_____ €/mt
Total value :	_____ €/mt